


Specifications

no
clamping
needed

Load range	0.1 N–6.5 kN
Tensile strength	up to 80 MPa
Measurement time	1 min up to 99 h, depending on task and objective
Conformity	ISO 4624; JIS K 5600-5-7; DIN EN 15870; DIN EN 14869-2

Samples	up to 8 simultaneously
Sample dimension	max. 30 mm x 30 mm x >1 mm
Adherent area	diameter 7 mm, 10 mm and customized
Test stamp material	metal or non-metal
Test stamp weight	4.1 g - 38.7 g (W/Cu up to ca. 58 g)

Dimensions (W x H x D)	38 x 29.6 x 64 cm ³
Weight	56 kg, desktop
Rotor speed	100–13,000 rpm
Temperature control	–11°C to +40 °C
Data interface	USB
Power supply	100 V, 120 V, 230 V; 50/60 Hz
Power consumption	max. 1050 W

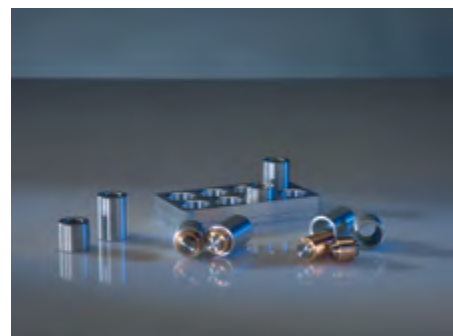

LUM GmbH, Berlin, Germany

Phone: +49 30 6780 60 30

E-Mail: info@lum-gmbh.de

Web: www.lum-gmbh.com

www.dispersion-letters.com

www.lumifrac.com

Distributed by:

